

DOME HD IP CAMERAS

SCADSR30

General Features :



IR Vandalproof Dome, 3.6mm Fixed Lens, 30m Night Vision

Sensor: SONY\OmniVision

DSP: Hisilicon\TI \ Ambarella

ONVIF 2.4, NVR\CMS\Web Recording

960P\P2P\POE\IR-CUT

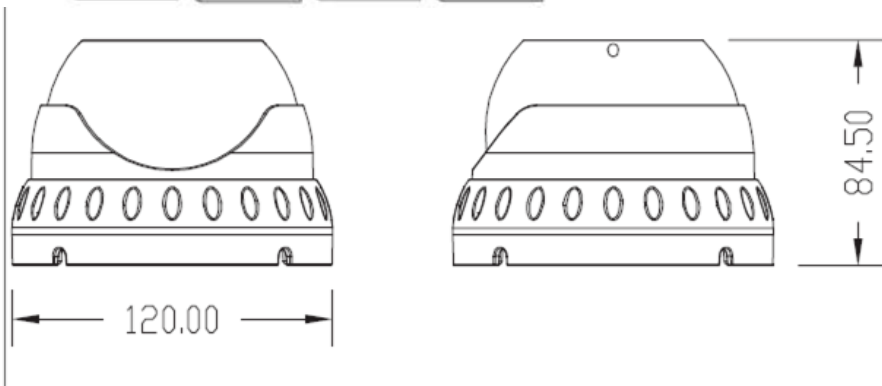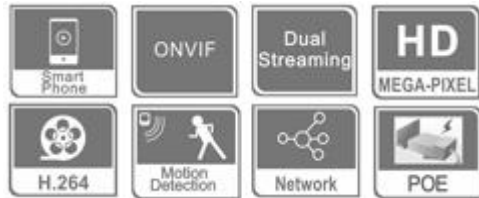

| Model NO. | SCADSR30H130 | SCADSR30H200 | SCADSR30H400 | SCADSR30M200 | SCADSR30M400 | SCADSR30E200 | ADSR30E300 |
|-------------------------|---|-----------------|--------------------|-----------------|--------------------|-----------------|-----------------|
| Camera | | | | | | | |
| Image Sensor | IMX238 | IMX222 | OV4689 | OV2710 | OV4689 | IMX322 | IMX124 |
| Main processor | HI3518C | HI3516C | HI3516D | GM8136S | GM8138S | A5S66 | S2L |
| Resolution | 960P | 1080P | 1.5K | 1080P | 1.5K | 1080P | 1080P |
| Effective Pixels | 1280(H)*960(V) | 1920(H)*1080(V) | 2688 (H) *1520 (V) | 1920(H)*1080(V) | 2688 (H) *1520 (V) | 1920(H)*1080(V) | 2048(H)*1536(V) |
| TV System | PAL/NTSC | | | | | | |
| Electronic Shutter Time | Auto: PAL 1/1-1/10000Sec; NTSC 1/1-1/10000Sec | | | | | | |
| Sync System | Internal | Internal | External | Internal | External | External | External |
| Usable Illumination | 0.01Lux | 0.01Lux | 0.01Lux | 0.01Lux | 0.01Lux | 0.01Lux | 0.1Lux |
| S/N Ratio | ≥52dB | | | | | | |
| Scanning System | Progressive | | | | | | |
| Video Output | Network | | | | | | |
| Lens | | | | | | | |
| Focus Length | Board Lens 6mm/F2.0 | | | | | | |
| Focus Control | Fixed | | | | | | |
| Lens Type | Fixed | | | | | | |

| Pixels | 2M Pixels | 3M Pixels | 4M Pixels | 3M Pixels | 4M Pixels | 3M Pixels | 3M Pixels |
|---------------------|--|---------------------------------|-----------------|---------------------------------|-----------------|---------------------------------|-----------------|
| Night Vision | | | | | | | |
| Infrared LED | ☉ 5X36PCS | | | | | | |
| Infrared Distance | 30M | | | | | | |
| IR Status | Under 10 Lux By CDS | | | | | | |
| IR Power On | CDS Auto Control | | | | | | |
| Network | | | | | | | |
| Ethernet | RJ-45 (10/100Base-T) | | | | | | |
| Protocol | IPv4, HTTP, TCP/IP, FTP, NTP, RTSP, UDP, SMTP, DNS, DDNS | | | | | | |
| ONVIF | Support ONVIF 2.4 | | | | | | |
| P2P | YES, Support QR Code | | | | | | |
| POE | Optional, Support IEEE 802.3af | | | | | | |
| WIFI | N/A | | | | | | |
| Video Delay | 0.3S (Within the Lan) | | | | | | |
| Main Stream | 1280*960@30fps | 1920*1080@30fps | 2688*1520@30fps | 1920*1080@30fps | 2688*1520@30fps | 1920*1080@30fps | 1920*1080@30fps |
| Sub Stream | 704*576@30fps, 352*288@30fps | 704*576@30fps, 352*288@30fps | 704*576@30fps | 704*576@30fps, 352*288@30fps | 704*576@30fps | 704*576@30fps, 352*288@30fps | 704*576@30fps |
| IE Brower | IE6-11, Google Chrome(IE Tab), Firefox(IE Tab) | | | | | | |

| | |
|------------------------|---|
| Smart Phone | iPhone, iPad, Android, Android Pad |
| Camera Features | |
| Day/Night | Color/ B&W (IR-CUT) |
| Compression | H.264/JPEG,Support record AVI format. |
| Image Config | Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, BLC, FLK(Flicker Control) |
| Motion Detection | Support |
| Privacy Masking | 3 Rectangular Zone |
| WDR | YES |
| Recording Mode | NVR/NAS/CMS/Web |
| Language | Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Farsi, German, Russian, French, Korean, Portugese, Japanese, Turkish, Spanish, Hebrew, Italian |
| General | |
| Housing | Vandalproof(metal) |
| Anti-cut Bracket | No, Without Bracket |
| IR Cut Filter | YES |
| Operation Temperature | -10°C ~ +50°C RH95% Max |
| Storage Temperature | -20°C ~ +60°C RH95% Max |
| Power Source | DC12V±10%, 700mA |

| | |
|-----------|------------------|
| Dimension | ∅ 131 x 93(H) mm |
| Weight | 800g |

