



DOME HD IP CAMERAS

SCADV20

General Features :


IP66 IR Vandalproof Dome, 2.8-12 Varifocal Lens, 20m Night Vision

Sensor: SONY\Aptina\OmniVision

DSP: Hisilicon\TI \ Ambarella

ONVIF 2.4, NVR\CMS\Web Recording

1080P\P2P\POE\IR-CUT

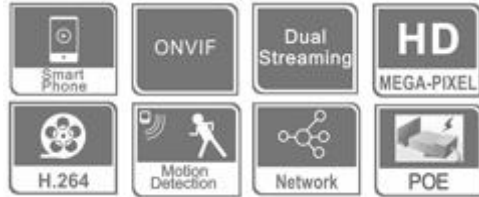

Model NO.	SCADV20H130	SCADV20H200	SCADV20H400	SCADV20M200	SCADV20M400	SCADV20E200	SCADV20E300
Camera							
Image Sensor	IMX238	IMX222	OV4689	OV2710	OV4689	IMX322	IMX124
Main processor	HI3518C	HI3516C	HI3516D	GM8136S	GM8138S	A5S66	S2L

www.senscam.com

Email: info@senscaom.com





Resolution	960P	1080P	1.5K	1080P	1.5K	1080P	1080P
Effective Pixels	1280(H)*960(V)	1920(H)*1080(V)	2688 (H) *1520 (V)	1920(H)*1080(V)	2688 (H) *1520 (V)	1920(H)*1080(V)	2048(H)*1536(V)
TV System	PAL/NTSC						
Electronic Shutter Time	Auto: PAL 1/1-1/10000Sec; NTSC 1/1-1/10000Sec						
Sync System	Internal	Internal	External	Internal	External	External	External
Usable Illumination	0.01Lux	0.01Lux	0.01Lux	0.01Lux	0.01Lux	0.01Lux	0.1Lux
S/N Ratio	≥52dB						
Scanning System	Progressive						
Video Output	Network						
Lens							
Focus Length	2.8-12mm						
Focus Control	Manual						
Lens Type	Manual						
Pixels	2M Pixels	3M Pixels	4M Pixels	3M Pixels	4M Pixels	3M Pixels	3M Pixels
Night Vision							
Infrared LED	Φ 5X21PCS						





Infrared Distance	20M						
IR Status	Under 10 Lux By CDS						
IR Power On	CDS Auto Control						
Network							
Ethernet	RJ-45 (10/100Base-T)						
Protocol	IPv4, HTTP, TCP/IP, FTP, NTP, RTSP, UDP, SMTP, DNS, DDNS						
ONVIF	Support ONVIF 2.4						
P2P	YES, Support QR Code						
POE	Optional, Support IEEE 802.3af						
WIFI	N/A						
Video Delay	0.3S (Within the Lan)						
Main Stream	1280*960@30fps	1920*1080@30fps	2688*1520@30fps	1920*1080@30fps	2688*1520@30fps	1920*1080@30fps	1920*1080@30fps
Sub Stream	704*576@30fps, 352*288@30fps	704*576@30fps, 352*288@30fps	704*576@30fps	704*576@30fps, 352*288@30fps	704*576@30fps	704*576@30fps, 352*288@30fps	704*576@30fps
IE Brower	IE6-11, Google Chrome(IE Tab), Firefox(IE Tab)						
Smart Phone	iPhone, iPad, Android, Android Pad						
Camera Features							
Day/Night	Color/ B&W (IR-CUT)						





Compression	H.264/JPEG,Support record AVI format.
Image Config	Saturation/Brightness/Contrast /Sharpness, Mirror, 3D NR , White Balance, BLC, FLK(Flicker Control)
Motion Detection	Support
Privacy Masking	3 Rectangular Zone
WDR	YES
Recording Mode	NVR/NAS/CMS/Web
Language	Chinese Simplified, Chinese Traditional, English, Bulgarian, Polish, Farsi, German, Russian, French, Korean, Portuguese, Japanese, Turkish, Spanish, Hebrew, Italian
General	
Housing	Vandalproof (Metal, IP66)
Anti-cut Bracket	Yes, 3-Axis Bracket Built-in for Lens Adjustment
IR Cut Filter	YES
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 500mA
Dimension	Φ 145x 108(H) mm
Weight	1.2KG

