



8CH 1080P NVR

SCAS-N0850



General Features :


8CH 960H Standalone DVR, 960*480/960*576

HDMI/VGA/ TV synchronous video output

8 channel synchronous realtime playback, GRID interface & smart search

Support 1 SATA HDD up to 4TB, 2 USB2.0,RJ-45,RS-485

Multiple network monitoring: Web viewer, CMS,Mobile Phone. Multilingual Support: 16 Type

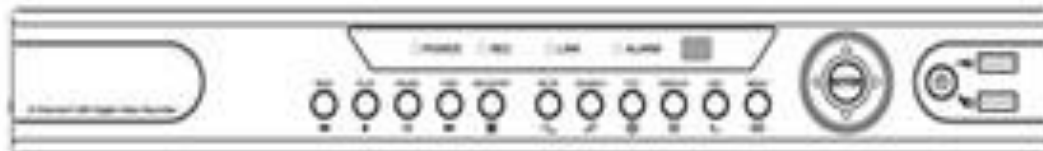

www.senscam.com

Email:info@senscam.com



Model	SCAS-N0850
System	
Main Processor	ARM Cortex A9 Processor
Operating System	Embedded LINUX
Video	
Input	8 Channel, Support 1920×1080, 1280×960, 1280×720 ect...
Output	1 VGA, 1 HDMI
Alarm	
Sensor Input	NO
Output	NO
Motion Detection	8 Channel
Email Alarm	Support
Display	
VGA	Resolution: 800×600, 1024×768, 1280×720, 1280×1024, 1920×1080
HDMI	Resolution: 720P(1280×720), 1080P(1920×1080)
Display Split	8 Channel / 6 Channel / 4 Channel / 1Channel

Digital Zoom	YES
OSD	Camera Title, Time, Video Loss, Recording, Motion Detection
Recording	
Video Compression	H.264
Resolution	1080P(1920×1080) / 960P(1280×960) / 720P(1280×720) / D1 (704×576/704×480)
Record Rate	PAL : 1080P@200fps, 960P@200fps, 720P@200fps, D1@200fps NTSC: 1080P@240fps, 960P@240fps, 720P@240fps, D1@240fps
Record Mode	Manual\Timer\Motion Detection
Playback & Backup	
Local Sync Playback	1x1080P
Remote Sync Playback	YES
Search Mode	ALL, Channel, Manual, Time, Date, Motion Detection
Playback Functions	Play, Pause, Stop, Rewind, Fast Play, Slow Play, Digital Zoom
Backup Mode	USB Device/Network
Network	
Interface	1 RJ45 10M/100M Adaptive Ethernet Interface
Network Functions	HTTP, IPv4, TCP/IP, DNS, DHCP, NTP, DDNS

Onvif Version	Support Onvif 2.4
Web Browser	IE6-11, Firefox, Chrome (Under Windows System)
CMS Software	Support Windows XP / Windows Vista / Windows 7/ Windows 8
Cloud Support(P2P)	Yes
Smart Phone	iPhone, iPad, Android, Android Pad
Hard Disk Driver	
Interface Type	2 SATA Interface
Capacity	Up to 8TB capacity
General	
Language	Chinese, English, Polish, Czech, Russian, Thai, Hebrew, Arabic, Bulgarian, Farisa German, French, Portuguese, Turkic, Spanish, Italian, Hungarian, Romanian
USB Interface	2 USB 2.0 Interfaces
Power Supply	DC12V/3A
Working Environment	-10~55°C/10~90%
Dimension(W×D×H)	354mm×245mm×45mm
Weight	4.0KG (without HDD)