

BULLET AHD/CVI/TVI

SCAVA40



General Features :

Weatherproof IR IP66 Camera

DWDR\3DNR\Defog\Sense-up\Smart IR\UTC\OSD\Low Illumination.

2M Pixels Varifocal Lens 2.8-12mm

☉ 5X42PCS IR LED, IR Distance: 40M

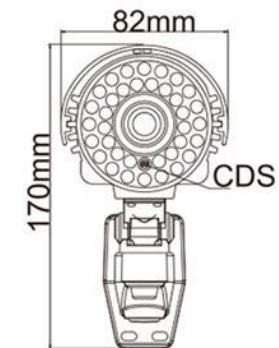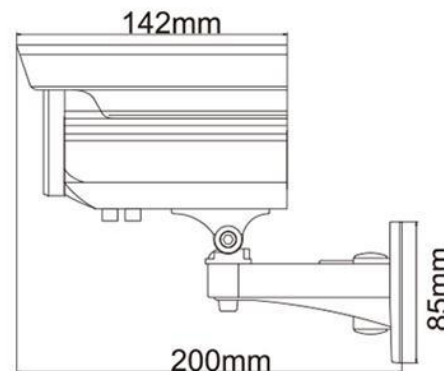



Model No.	SCAVA40 A100	SCAVA40 A130	SCAVA40 A200M	SCAVA40 A200H	SCAVA40 OC130L	SCAVA40 C130M	SCAVA40 C130H	SCAVA40 C200M	SCAVA40 C200H	SCAVA40 V130M	SCAVA40 V130H	SCAVA40 V130	SCAVA40 V200M	SCAVA40V200 H
Video Output Mode	AHD/CVBS	AHD/CVBS	AHD/CVBS	AHD/CVBS	CVI/CVBS	CVI	CVI/CVBS	CVI	CVI	TVI/CVBS	TVI/CVBS	TVI	TVI	TVI
Camera														
Image Sensor	OV9712S	IMX225	OV2710	IMX322	OV9750	AR0130	IMX225	OV2710	IMX322	OV9750	IMX225	IMX238	OV2710	IMX322
DSP	NVP2431H	NVP2431H	NVP2441H	NVP2441H	HTC960	FH8521+D H9801	HTC960	FH8530C	FH8530C	HTC960	HTC960	FH8521+TP 2801	FH8531+TP 2801	FH8531+TP2801
Image Resolution	720P/960H	960P/960H	1080P/960H	1080P/960H	960P/960H	960P	960P/960H	1080P	1080P	960P/960H	960P/960H	960P	1080P(960H)	1080P(960H)
Effective Pixels	1.0MP, 1280x720	1.3MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080	1.3MP, 1280x960	1.3MP, 1280x960	1.3MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080	1.3MP, 1280x960	1.3MP, 1280x960	1.4MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080
TV System	PAL/NTSC													
Electronic Shutter	1/25s~1/50,000s , 1/30s~1/60,000s													
Sync System	Internal													
Usable Illumination	0.01Lux	0.005Lux	0.001Lux	0.001Lux	0.01Lux	0.01Lux	0.005Lux	0.01Lux	0.01Lux	0.01Lux	0.005Lux	0.001Lux	0.01Lux	0.01Lux
S/N Ratio	≥50dB													





Scanning System	Progressive Scan
Lens	
Focus Length	2.8-12mm
Focus Control	Manual
Lens Type	Manual
Pixels	2M Pixels
Auto Iris Support	NO
Night Vision	
Infrared LED	Φ 5X42PCS
Infrared Distance	40M
IR Status	Under 10 Lux by CDS
IR Power On	CDS Auto Control
Camera Features	



Day/Night	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W
OSD Menu Language	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
White Balance	Auto/Manual	Auto/Manual	Auto/Manual	Auto/Manual	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Gain Control	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Noise Reduction	3D NR	3D NR	3D NR	3D NR	2D NR	3D NR	2D NR	2D NR	2D NR	2D NR	2D NR	2D NR	3D NR	2D NR
Picture Adjustment	YES	YES	YES	YES	NO	YES	NO	YES	YES	NO	NO	NO	YES	YES
WDR	DWDR	DWDR	DWDR	DWDR	NO	WDR	NO	WDR	WDR	NO	NO	NO	WDR	WDR
OSD Support	YES	YES	YES	YES	NO	NO	NO	NO	NO	NO	NO	No	Optional	Optional

General														
Weatherproof Housing	YES, IP66													
Anti-cut Bracket	YES, 2-Axis													



Dual Voltage	NO
IR Cut Filter	YES
Heater	NO
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 700mA
Dimension	200(W)x171(H)x83(D)mm
Weight	1.4Kg

