



BULLET AHD/CVI/TVI

SCAVA60

General Features :

2M Pixels Fixed Lens 3.6mm/F2.0

☉ 5X72PCS IR LED, IR Distance: 60M

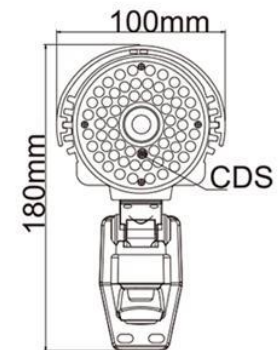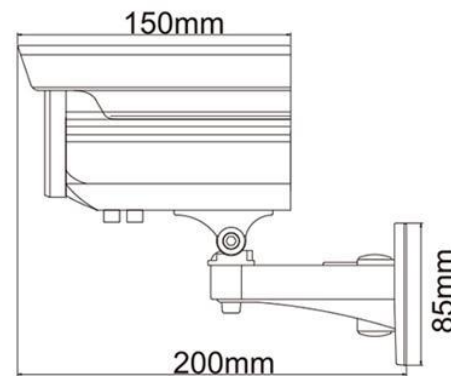

Model No.	SCAVA60 A100	SCAVA60 A130	SCAVA60 A200M	SCAVA60 A200H	SCAVA60 OC130L	SCAVA60 C130M	SCAVA60 C130H	SCAVA60 C200M	SCAVA60 C200H	SCAVA60 V130M	SCAVA60 V130H	SCAVA60 V130	SCAVA60 V200M	SCAVA60V200 H
Video Output Mode	AHD/CVBS	AHD/CVBS	AHD/CVBS	AHD/CVBS	CVI/CVBS	CVI	CVI/CVBS	CVI	CVI	TVI/CVBS	TVI/CVBS	TVI	TVI	TVI

Camera

Image Sensor	OV9712S	IMX225	OV2710	IMX322	OV9750	AR0130	IMX225	OV2710	IMX322	OV9750	IMX225	IMX238	OV2710	IMX322	
DSP	NVP2431H	NVP2431H	NVP2441H	NVP2441H	HTC960	FH8521+DH9801	HTC960	FH8530C	FH8530C	HTC960	HTC960	FH8521+TP2801	FH8531+TP2801	FH8531+TP2801	
Image Resolution	720P/960H	960P/960H	1080P/960H	1080P/960H	960P/960H	960P	960P/960H	1080P	1080P	960P/960H	960P/960H	960P	1080P(960H)	1080P(960H)	
Effective Pixels	1.0MP, 1280x720	1.3MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080	1.3MP, 1280x960	1.3MP, 1280x960	1.3MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080	1.3MP, 1280x960	1.3MP, 1280x960	1.4MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080	
TV System	PAL/NTSC														
Electronic Shutter	1/25s~1/50,000s , 1/30s~1/60,000s														
Sync System	Internal														
Usable Illumination	0.01Lux	0.005Lux	0.001Lux	0.001Lux	0.01Lux	0.01Lux	0.005Lux	0.01Lux	0.01Lux	0.01Lux	0.01Lux	0.005Lux	0.001Lux	0.01Lux	0.01Lux
S/N Ratio	≥50dB														
Scanning System	Progressive Scan														

Lens



Focus Length	2.8-12mm
Focus Control	Manual
Lens Type	Manual
Pixels	2M Pixels
Auto Iris Support	NO

Night Vision

Infrared LED	Φ 5X72PCS
Infrared Distance	60M
IR Status	Under 10 Lux by CDS
IR Power On	CDS Auto Control

Camera Features

Day/Night	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W	Auto (ICR) / Color / B&W
OSD Menu Language	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
White Balance	Auto/Manual	Auto/Manual	Auto/Manual	Auto/Manual	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Gain Control	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto



Noise Reduction	3D NR	3D NR	3D NR	3D NR	2D NR	3D NR	2D NR	2D NR	2D NR	2D NR	2D NR	3D NR	2D NR	2D NR
Picture Adjustment	YES	YES	YES	YES	NO	YES	NO	YES	YES	NO	NO	NO	YES	YES
WDR	DWDR	DWDR	DWDR	DWDR	NO	WDR	NO	WDR	WDR	NO	NO	NO	WDR	WDR
OSD Support	YES	YES	YES	YES	NO	NO	NO	NO	NO	NO	NO	No	Optional	Optional

General

Weatherproof Housing	YES, IP66
Anti-cut Bracket	YES, 2-Axis
Dual Voltage	NO
IR Cut Filter	YES
Heater	NO
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 1000mA
Dimension	240(W)x186(H)x100(D)mm
Weight	1.7Kg