



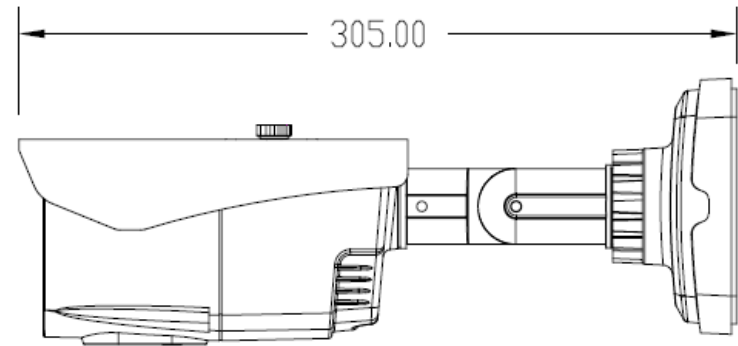

AUTO ZOOM

SCAVBN60X

General Features :

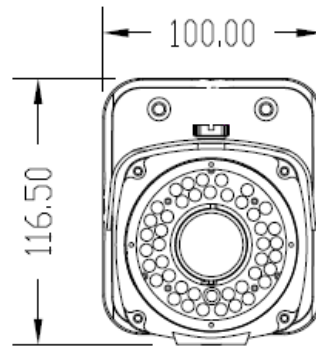



| Model NO. | SCAVBN60XHA | SCAVBN60XA130 | SCAVBN60XE200 |
|-------------------------|--|-----------------------------------|---|
| Camera | | | |
| Category | Analogue Camera | HD Camera | IP Camera |
| CCD/CMOS | CCD | CMOS | CMOS |
| Image Sensor | ICX811AK | IMX238 | IMX238 |
| DSP | Effio-A | 2431H | A5S66 |
| Horizontal Resolution | 720TVL | 1.4MP | 3MP |
| Effective Pixels | 976(H)×582(V) | 1280(H)×960(V) | 1280(H)×960(V) |
| TV System | PAL/NTSC | | |
| Electronic Shutter Time | Auto: PAL 1/50-1/100, 000Sec; NTSC 1/60-1/100, 000Sec | 1/25s~1/50,000s , 1/30s~1/60,000s | Auto: PAL 1/1-1/10000Sec; NTSC 1/1-1/10000Sec |
| Sync System | Internal | | External |
| Usable Illumination | 0.001Lux/F2.0 | 0.001Lux/F2.0 | 0.001Lux/F2.0 |
| S/N Ratio | ≥50dB | ≥50dB | ≥52dB |
| Gamma Correction | 0.45 | | |
| Scanning System | PAL:625 Lines, 50 Field/Sec;NTSC:525 Lines, 60 Field/Sec | Progressive Scan | Progressive Scan |
| Video Output | Composite Signal (1.0Vp-p, 75Ω) | AHD/CVBS (960H) (BNC) | Network |
| Lens | | | |



| | | | |
|------------------------|-----------------------------------|---|---|
| Focus Length | 2.8-12mm | | |
| Focus Control | Auto | | |
| Lens Type | Auto | | |
| Pixels | 2M Pixels | | |
| Auto Iris Support | Auto | | |
| Night Vision | | | |
| Infrared LED | Φ 5X72PCS | | |
| Infrared Distance | 60M | | |
| IR Status | Under 10 Lux By CDS | | |
| IR Power On | CDS Auto Control | | |
| Camera Features | | | |
| Day/Night | Color/ B&W | Auto (ICR) / Color / B&W | Color/ B&W (IR-CUT) |
| OSD Menu Language | CN, EN, FR, DE, JP, ES, PT, RU | EN, CN, DE, FRA, IT, ES PL, RU, PT, NL, TR | CN,EN,BG,PL,FA,DE,RU FR,KO,PT,JA,TR,ES,HE,IT |
| Defog | YES | NO | NO |
| Sense-up | YES | YES | YES |
| Smart-IR | YES | NO | YES |
| Wide Dynamic Range | Super DWDR | DWDR | WDR |



| | | | |
|------------------------|--------------------------|-------|-------|
| Backlight Compensation | YES | NO | NO |
| White Balance | AUTO | AUTO | AUTO |
| Gain Control | AUTO | AUTO | AUTO |
| Noise Reduction | 3D NR | 3D NR | 3D NR |
| Privacy Masking | YES | NO | NO |
| Digital Zoom | NO | NO | YES |
| Picture Adjustment | YES | YES | YES |
| UTC Support | YES | NO | NO |
| General | | | |
| Weatherproof Housing | YES, IP66 | | |
| Lens Angle Adjustment | YES, 3-Axis | | |
| Dual Voltage | NO | | |
| IR Cut Filter | NO | | |
| Heater | NO | | |
| Operation Temperature | -10°C ~ +50°C RH95% Max | | |
| Storage Temperature | -20°C ~ +60°C RH95% Max | | |
| Power Source | DC12V±10%, 1000mA | | |
| Dimension | 260(W) x 98(H) x 95(D)mm | | |
| Weight | 1.7KG | | |

