
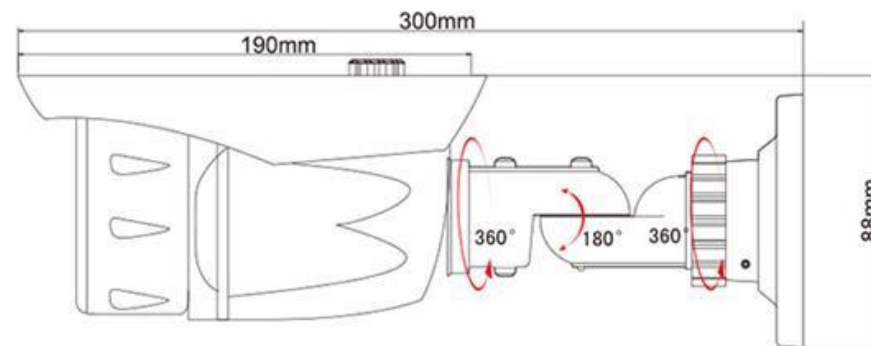


# BULLET AHD/CVI/TVI

## SCAVK60

### General Features :

- Weatherproof IR IP66 Camera
- DWDR/DNR/Defog/Sense-up/Smart IR/IRC/UTC/OSD/Low Illumination
- 2M Pixels Fixed Lens 3.6mm/F2.0
- ☉ 5X72PCS IR LED, IR Distance: 60M

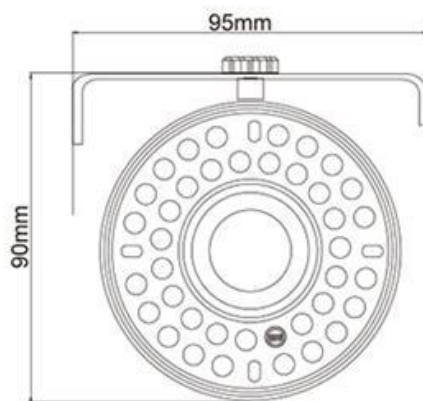



Model No.	SCAVK60 A100	SCAVK60 A130	SCAVK60 A200M	SCAVK60 A200H	SCAVK60 C130L	SCAVK60C 130M	SCAVK60C 130H	SCAVK60C 200M	SCAVK60C 200H	SCAVK60 V130M	SCAVK60 V130H	SCAVK60 V130	SCAVK60 V200M	SCAVK60V200 H
Video Output Mode	AHD/CVBS	AHD/CVBS	AHD/CVBS	AHD/CVBS	CVI/CVBS	CVI	CVI/CVBS	CVI	CVI	TVI/CVBS	TVI/CVBS	TVI	TVI	TVI
<b>Camera</b>														
Image Sensor	OV9712S	IMX225	OV2710	IMX322	OV9750	AR0130	IMX225	OV2710	IMX322	OV9750	IMX225	IMX238	OV2710	IMX322
DSP	NVP2431H	NVP2431H	NVP2441H	NVP2441H	HTC960	FH8521+DH9801	HTC960	FH8530C	FH8530C	HTC960	HTC960	FH8521+TP2801	FH8531+TP2801	FH8531+TP2801
Image Resolution	720P/960H	960P/960H	1080P/960H	1080P/960H	960P/960H	960P	960P/960H	1080P	1080P	960P/960H	960P/960H	960P	1080P(960H)	1080P(960H)
Effective Pixels	1.0MP, 1280x720	1.3MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080	1.3MP, 1280x960	1.3MP, 1280x960	1.3MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080	1.3MP, 1280x960	1.3MP, 1280x960	1.4MP, 1280x960	2.1MP, 1920x1080	2.4MP, 1920x1080
TV System	PAL/NTSC													
Electronic Shutter	1/25s~1/50,000s, 1/30s~1/60,000s													
Sync System	Internal													
Usable Illumination	0.01Lux	0.005Lux	0.001Lux	0.001Lux	0.01Lux	0.01Lux	0.005Lux	0.01Lux	0.01Lux	0.01Lux	0.005Lux	0.001Lux	0.01Lux	0.01Lux
S/N Ratio	≥50dB													
Scanning System	Progressive Scan													
<b>Lens</b>														
Focus Length	2.8-12mm													





Focus Control	Manual														
Lens Type	Manual														
Pixels	2M Pixels														
Auto Iris Support	NO														
<b>Night Vision</b>															
Infrared LED	Φ 5X72PCS														
Infrared Distance	60M														
IR Status	Under 10 Lux by CDS														
IR Power On	CDS Auto Control														
<b>Camera Features</b>															
Day/Night	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W	Auto (ICR ) / Color / B&W
OSD Menu Language	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	EN, CN, DE, FRA, IT, ES, PL, RU, PT, NL, TR	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
White Balance	Auto/Manual	Auto/Manual	Auto/Manual	Auto/Manual	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Gain Control	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto	Auto
Noise Reduction	3D NR	3D NR	3D NR	3D NR	2D NR	3D NR	2D NR	2D NR	2D NR	2D NR	2D NR	2D NR	3D NR	2D NR	2D NR



Picture Adjustment	YES	YES	YES	YES	NO	YES	NO	YES	YES	NO	NO	NO	YES	YES
WDR	DWDR	DWDR	DWDR	DWDR	NO	WDR	NO	WDR	WDR	NO	NO	NO	WDR	WDR
OSD Support	YES	YES	YES	YES	NO	NO	NO	NO	NO	NO	NO	No	Optional	Optional

## General

Weatherproof Housing	YES, IP66
Anti-cut Bracket	YES, 3-Axis
Dual Voltage	NO
IR Cut Filter	YES
Heater	NO
Operation Temperature	-10°C ~ +50°C RH95% Max
Storage Temperature	-20°C ~ +60°C RH95% Max
Power Source	DC12V±10%, 1000mA
Dimension	295(W)x120(H)x103(D)mm
Weight	1.7Kg

