



BULLET AHD/CVI/TVI

SCAVP20

General Features :

2M Pixels Fixed Lens 3.6mm/F2.0

☉ 5X24PCS IR LED, IR Distance: 20M

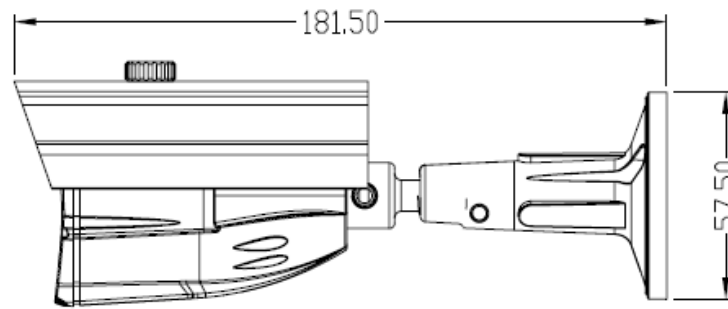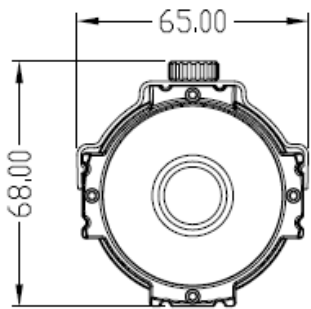



| Model NO. | SCAVP20A100 | SCAVP20A130 | SCAVP20A200M | SCAVP20A200H |
|---------------------|-----------------------------------|-----------------|------------------|------------------|
| Video Output Mode | AHD/CVBS | AHD/CVBS | AHD/CVBS | AHD/CVBS |
| Camera | | | | |
| Image Sensor | OV9712S | IMX225 | OV2710 | IMX322 |
| DSP | NVP2431H | NVP2431H | NVP2441H | NVP2441H |
| Image Resolution | 720P/960H | 960P/960H | 1080P/960H | 1080P/960H |
| Effective Pixels | 1.0MP, 1280x720 | 1.3MP, 1280x960 | 2.1MP, 1920x1080 | 2.4MP, 1920x1080 |
| TV System | PAL/NTSC | | | |
| Electronic Shutter | 1/25s~1/50,000s , 1/30s~1/60,000s | | | |
| Sync System | Internal | | | |
| Usable Illumination | 0.01Lux | 0.005Lux | 0.001Lux | 0.001Lux |
| S/N Ratio | ≥50dB | | | |
| Scanning System | Progressive Scan | | | |
| Lens | | | | |





| | |
|-------------------|-----------------------|
| Focus Length | Board Lens 3.6mm/F2.0 |
| Focus Control | Fixed |
| Lens Type | Fixed |
| Pixels | 2M Pixels |
| Auto Iris Support | NO |

Night Vision

| | |
|-------------------|---------------------|
| Infrared LED | ☺ 5X24PCS |
| Infrared Distance | 20M |
| IR Status | Under 10 Lux by CDS |
| IR Power On | CDS Auto Control |

Camera Features

| | | | | |
|--------------------|---|---|---|---|
| Day/Night | Auto (ICR) / Color / B&W | Auto (ICR) / Color / B&W | Auto (ICR) / Color / B&W | Auto (ICR) / Color / B&W |
| OSD Menu Language | EN, CN, DE, FRA, IT, ES PL, RU, PT, NL, TR | EN, CN, DE, FRA, IT, ES PL, RU, PT, NL, TR | EN, CN, DE, FRA, IT, ES PL, RU, PT, NL, TR | EN, CN, DE, FRA, IT, ES PL, RU, PT, NL, TR |
| White Balance | Auto/Manual | Auto/Manual | Auto/Manual | Auto/Manual |
| Gain Control | Auto | Auto | Auto | Auto |
| Noise Reduction | 3D NR | 3D NR | 3D NR | 3D NR |
| Picture Adjustment | YES | YES | YES | YES |





| | | | | |
|-----------------------|--------------------------|------|------|------|
| WDR | DWDR | DWDR | DWDR | DWDR |
| OSD Support | YES | YES | YES | YES |
| General | | | | |
| Weatherproof Housing | YES, IP66 | | | |
| Anti-cut Bracket | YES, 3-Axis | | | |
| Dual Voltage | NO | | | |
| IR Cut Filter | YES | | | |
| Heater | NO | | | |
| Operation Temperature | -10°C ~ +50°C RH95% Max | | | |
| Storage Temperature | -20°C ~ +60°C RH95% Max | | | |
| Power Source | DC12V±10%, 500mA | | | |
| Dimension | 182(W) x 65(H) x 68(D)mm | | | |
| Weight | 450g | | | |

