

# 16CH 1080P NVR

## SCAS-N1650H


### General Features :

16CH FULL 1080P NVR, 1920\*1080, All Real Time

HDMI, VGA, RJ-45, 2xUSB, Black Casing

2 SATA 3.5' Hard Disk Interface, 2x2TB HDD Capacity

Remote Viewable by Smart Phone/Computer/Tablet With Internet Access

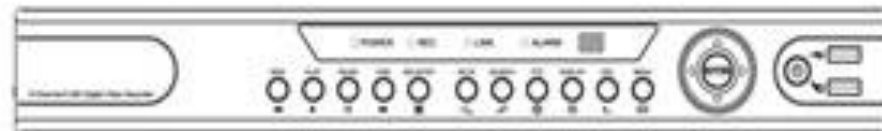

<b>Model</b>	<b>SCAS-N1650H</b>
<b>System</b>	
Main Processor	ARM Cortex A9 Processor(HI3535)
Operating System	Embedded LINUX
<b>Video</b>	
Input	16 Channel, Support 1920×1080, 1280×960, 1280×720 ect...
Output	1 VGA, 1 HDMI
<b>Alarm</b>	
Sensor Input	NO
Output	NO
Motion Detection	16 Channel
Email Alarm	Support
<b>Display</b>	
VGA	Resolution: 1024×768、 1280×720、 1280×1024
HDMI	Resolution: 1080P(1920×1080) 720P:(1280×720)
Display Split	16 Channel / 9 Channel / 8 Channel / 6 Channel / 4 Channel / 1Channel
Digital Zoom	NO
OSD	Camera title, Time, Video loss, Recording, Motion Detection
<b>Recording</b>	
Video Compression	H.264

Resolution	1080P(1920×1080) / 960P(1280×960) / 720P(1280×720) / D1 (704×576/704×480)
Record Rate	PAL :1080P@400fps, 960P@400fps,720P@400fps, D1@400fps NTSC:1080P@480fps, 960P@480fps 720P@480fps, D1@480fps
Record Mode	Timer \ Motion Detection
<b>Playback &amp; Backup</b>	
Local Sync Playback	4X1080P
Remote Sync Playback	YES
Search Mode	ALL, Channel, Time, Date, Motion Detection
Playback Functions	Play, Pause, Stop, Rewind, Fast play, Slow play
Backup Mode	USB Device
<b>Network</b>	
Interface	1 RJ45 10M/100M/1000M Adaptive Ethernet Interface
Network Functions	HTTP, IPv4, TCP/IP, DNS,DHCP,NTP,DDNS
Onvif Version	Support Onvif 2.4
Web Browser	IE8-11, Firefox, Google Chrome
CMS Software	Support Windows XP /Windows Vista/Windows 7/Windows 8
Cloud Support(P2P)	Yes
Smart Phone	iPhone, iPad, Android, Android PAD
<b>Hard Disk Driver</b>	
Interface Type	2 SATA Interface
Capacity	Up to 8TB capacity

General	
Language	Chinese , English, Polish, Czech, Russian, Thai , Hebrew , Arabic , Bulgarian , Farsi , German , French , Portuguese , Turkic , Spanish , Italian , Hungarian , Romanian
USB Interface	2 USB 2.0 Interfaces
Power Supply	DC12V/3A
Working Environment	-10~55°C/10~90%
Dimension(W×D×H)	354*245*45mm
Weight	4.0KG (without HDD)

